

1.9m/2.2m UV Hybrid Printer with Convey Belt




Convey belt is adopted to ensure more steady material handling.
Intelligent color correction. The color is more realistic
Intelligent printing mode. Computer just needs to be operated once a day.
Industrial Print heads allow the printer to work 24 hours.
Automatic ink cartridge alarm system gives warning for lack of ink



01

High Resolution


High resolution (600dpi per color).
Can achieve up to 4 colors output

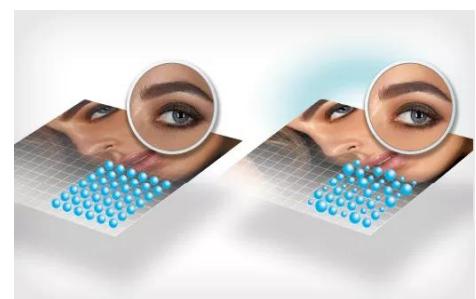

03

Multi-gray output

Epson's unique VSDT (Variable Ink Drop Technology) can freely control ejected ink droplet size, thereby reducing graininess of picture, presenting more picture details, smooth color transition, and high saturation.

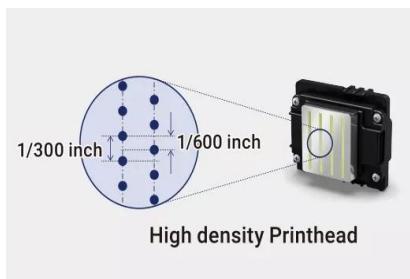

02

PrecisionCore technology

The nozzle arrangement (600dpi 2 rows) realizes the print head's compact structure, high speed, good quality and durability

Technical Parameters

Model	YJ1900E-UV / YJ2200E-UV			
Print Head	Epson i3200 U1 (CMYK-W-CMYK, CMYK, W-CMYK)			
Max Printing Width	1900mm / 2200mm			
Printing Platform	Vacuum suction conveyor belt, ink stack lifts automatically, liftable carriage height			
Printing Speed	3 pass	45m ² /h (color)	3 pass	26m ² /h (color-w-color)
	4 pass	35m ² /h (color)	4 pass	18m ² /h (color-w-color)
	6 pass	25m ² /h (color)	6 pass	12m ² /h (color-w-color)
Ink	Imported eco-friendly UV ink			
Ink System	Closed cycle ink system			
Max Media Thickness	0~20mm			
Media	Advertising materials such as stickers, adhesive vinyl, photo paper, reflective film, soft film, and so on.			
	Materials such as leather, floor mats, wall paper, canvas, and so on.			
Guide Rail	THK Linear Guide Rail			
Motor	Leadshine integrated motor			
Image Files	PNG, JPG, PSD, TIFF			
Data Port	Lan Cable			
Operation System	Win 7, Win 11			
Rip Software	Maintop, RIIN, Photo Print			
Power Supply	AC 110~220V, 50/60Hz			
Power	1500~2000W			
Environment	Temperature: 22 ~ 28°C, Humidity: 40% ~ 60% RH			
Machine Dimension	3600 x 1500 x 1450mm			
Package Dimension	4100 x 1700 x 1600mm			
Net Weight	500KG			
Gross Weight	700KG			

The parameters above are subject to change without prior notice